



Install  
Sound



## Vortis VR11514

The VR 11514 is a professional two-way fullrange speaker with an integrated passive crossover. Housed in a bass reflex enclosure designed for fixed installation, it is loaded with a 15" woofer and a 1.4" high-frequency driver coupled to a constant directivity horn. The installed VR 11514 is particularly well-suited for use as a mid-/high-range unit in long-throw applications. It excels at rendering live music in configurations with a subwoofer such as the compact HK Audio IL 115 Sub or IL 118 Sub. For larger and more complex sound reinforcement scenarios, we recommend that you operate this unit with the HK Audio FirNet Controller. A selection of three (asymmetric) horns is available with 60° x 40°, 90° x 55° and 60°- 90° x 55° coverage patterns that distribute sound evenly throughout the room.

All may be rotated 90°. The housing is made of MDF, coated with impact-resistant paint, and equipped with M10 bushings designed to accept HK Audio mounting hardware. An acoustic fabric covers its sturdy steel grille. This screen is, like the enclosures, available in all RAL colors. The outdoor version features speakers and housings modified to withstand adverse climatic conditions.

## Architect Specs

The professional compact speaker system shall be housed in a bass-reflex enclosure, and equipped with an 15" low/mid driver and 1.4" high-frequency driver coupled to a CD-horn.

The speaker system shall be available with 3 different horn versions: 60° x 40°, 90° x 55°, and an asymmetric horn with 60°–90° x 55° (horizontal x vertical).

It shall be possible to rotate all horns by 90° for an alternate coverage pattern.

The trapezoidal housing shall be made of MDF and coated with a polyurethane finish. The steel grille protecting the cabinet's front shall be covered with a visually opaque, but acoustically transparent fabric. The speaker including the front grille cloth shall be available in any RAL color.

The housing shall include a total of 13 mounting points (metric thread M10) for either vertical or horizontal installation or for affixing safety equipment, with 3 points each on top, bottom and back, plus 2 points each on the left and right sides. For best acoustic results and overload protection the speaker shall be operated in combination with the HK AUDIO DSM2060 or HK AUDIO FIRNET controllers. The appropriate speaker data set for each controller shall be available for download.

The speaker system shall have excellent speech intelligibility and precise coverage patterns with constant directivity from 800 Hz on up with the selected horn.

The speaker system shall have the following specifications:

2-way design with integrated passive crossover, **crossover frequency:** 990 Hz.

**Frequency response:** 55 Hz - 20 kHz (-10 dB).

**Sensitivity:** 106 dB @ 1W/1m in half space.

**Maximum SPL:** 130 dB in full space (measured with program spectrum following DIN 60268-01 [dB SPL]).

**Nominal power handling:** 350 W

**Program power handling:** 700 W

**Impedance:** 8 Ohm

**Directivity index (DI) for 60° x 40° horn:**

12 dB (+/-2.5dB), 800 Hz–16 kHz.

**Connectors:** 1x Speakon NL4, 2x speaker terminals

**Dimensions (H x D x W):** 81 x 52 x 40 cm (31-57/64 x 20-15/32 x 15-3/4 in.)


**Weight:** 30 kg (66-9/64 lbs)

The following accessories shall be available as options for the speaker system:


Wall mount plate, Cluster plates for 2 or 3 speakers, U-bracket, Adjustable mounting bracket, M10 Ringbolts

The professional compact speaker system shall be called the HK AUDIO VR11514.


# VR11514 performance charts

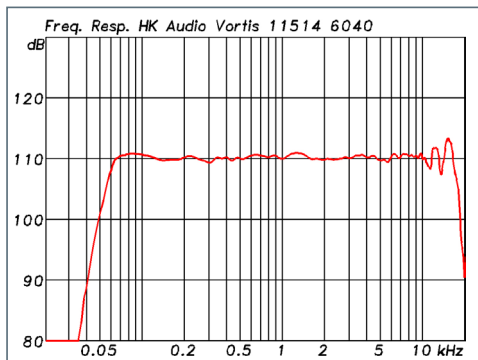


Frequency Response

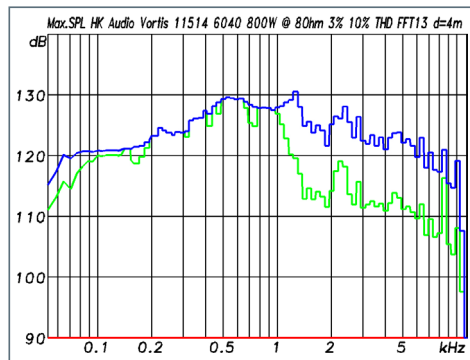


Max. SPL

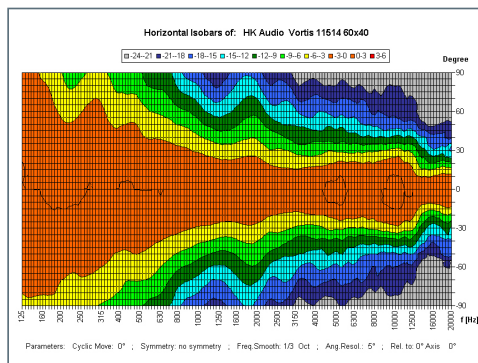


Horn variation 60°x40° horizontal

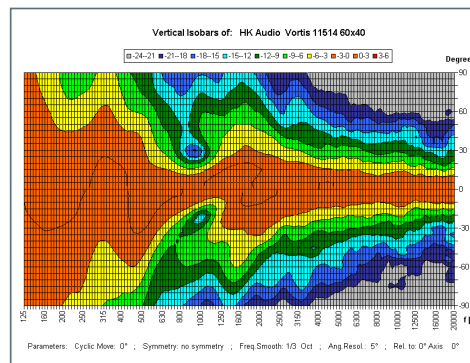


Horn variation 60°x40° vertical

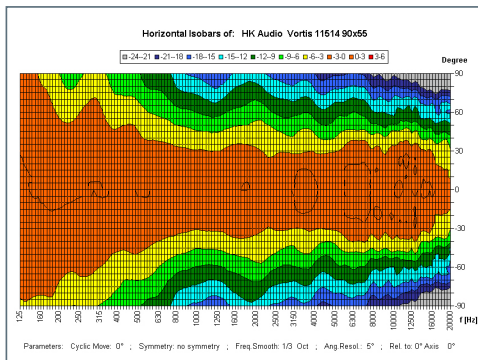


Horn variation 90° x 55° horizontal

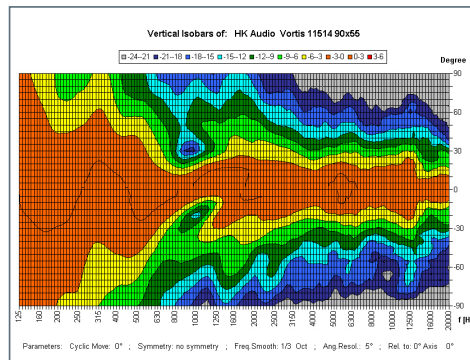





Horn variation 90° x 55° vertical

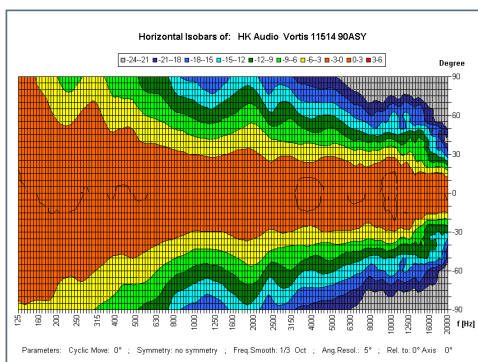

Horn variation 60°-90° x 55° horizontal

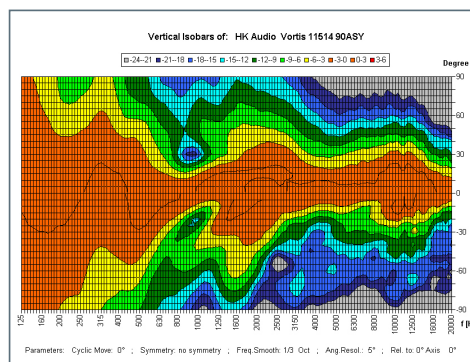

Horn variation 60°-90° x 55° vertical

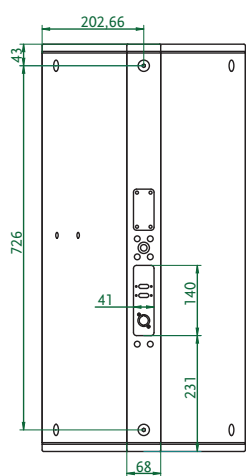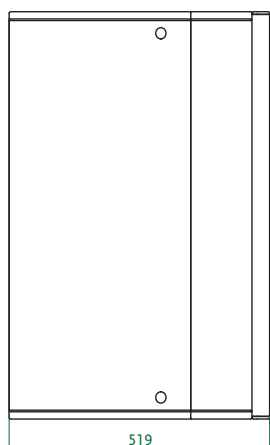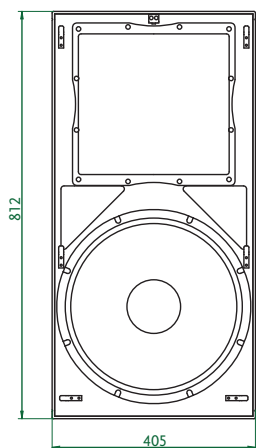

## Technical Data

VR 11514	
Power handling capacity nominal	350 watts
Power handling capacity programm	700 watts
Power handling capacity peak	1400 watts
Frequency response -10 dB	55 Hz-20 kHz
Crossover	2 way passive
Crossover Frequency	990 Hz, 2. order
Sensitivity 1W@1m, Fullspace, (100Hz - 20kHz) [dB SPL]	100
Sensitivity 1W@1m, Halfspace, (100 Hz - 20 kHz) [dB SPL]	106
Max SPL 10% THD, DIN 60268-01 Fullspace [dB SPL]	130
Nominal Impedance	8 ohms
Loudspeaker	1 x 15"
High frequency driver	1 x 1,4"
Horn variations: 60° x 40°, 90° x 55°, 60°- 90° x 55°	yes, rotatable
Directivity Index	Depends on horn variation
Connections	1 x NL 4, 2 x Terminal
Housing	MDF
Filter	Controller *
Finish	Polyurethan lacquer, every RAL Colour
Metal Grille with gloth	yes
Rigging Points	13 x M10
Weight	30 kg; 66,1 lbs
Dimensions in cm	81 x 52 x 40
H (inch)	31 57/64
D (inch)	20 15/32
W (inch)	15 3/4
Accessories	Wall mount plate, cluster plate, ringbolts, adjustable mounting bracket, U-Bolt



\* For better equalization and overload protection we recommend operating the speakers in combination with the HK AUDIO FIRNET or HK AUDIO DSM 2060 Controller.