

CS 218

Subwoofer

Part number: 1007645

Compact, direct-radiating, high-performance 2 x 18" subwoofer with large bass reflex ports. The high efficiency and extremely high power handling capacity provide an extraordinarily large dynamic headroom down to the lowest frequencies. Using the pin assignment switch, the CS 218 can be assigned to one of the two speaker paths.

Characteristics


- Compact, direct-radiating, high-performance 2x 18" subwoofer
- Tuned to match the 1×18" CS 118
- · High efficiency and extremely high power handling capacity
- 4 capped speakon NL4 connectors with pin assignment switch
- Ideal in combination with Lab.Gruppen PLM+ or Powersoft X-Series, with special filter settings to create cardioid or end-fire arrangements
- Cabinet made of birch multiplex, PU coated, solid, anti-corrosive, powder-coated steel front grille
- Low-resonance construction and high electronic load capacity
- Ideal addition to the COSMO line array and the CONTOUR X series





Technical data

	CS 218
	C3 2 16
Power-handling nominal (RMS)	3200 W
Power-handling, program	6400 W
Frequency response +/-3 dB	27 Hz – 100 Hz
Frequency response -10 dB	23 Hz - 100 Hz
Sensitivity 1 W @ 1 m	94 dB (30 Hz - 100 Hz), full space
Max. SPL @ 10 % THD (EN 60268-21:2019)	133 dB
Electrical impedance	4 ohms
LF Speaker	2x 18", 4" voice coil
Connections	4x Speakon NL4 (with sealing cap), 2 each front and rear, pin assignment switch
Integrated pole mount	2x M20
Carrying handles	8x MultiGrip
Housing	Birch multiplex
Finish	PU coating, black
Front grille	Steel front grill with anticorrosive coating, acoustic foam
Dimensions (WxHxD)	121 x 61 x 78 cm 47-41/64 x 24-5/32 x 30-23/32"
Weight	88.0 kg / 194.0 lbs

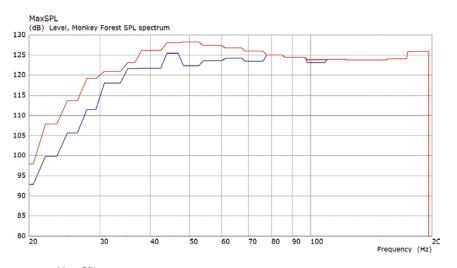

Max. SPL (blue = 3 % THD, red = 10 % THD)



Accessories

CS-WB-2

Part number: 1007699

The CS-WB-2 is a wheelboard including lashing strap for simple transportation of up to two CS 218 subwoofers.



Cover CS-WB-2

Part number: 1007703

The well-padded CS-WB-2 protective cover protects two CS 218 subwoofers on a CS-WB-2 wheelboard. Practical openings are available for connections.



CS 218 Subwoofer














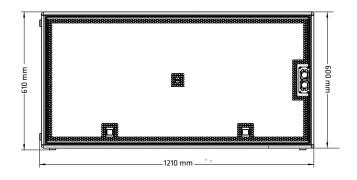





HK Audio Postfach 1509 66595 St. Wendel, Germany

> info@hkaudio.com fax +49-68 51-905 215 www.pro.hkaudio.com